Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

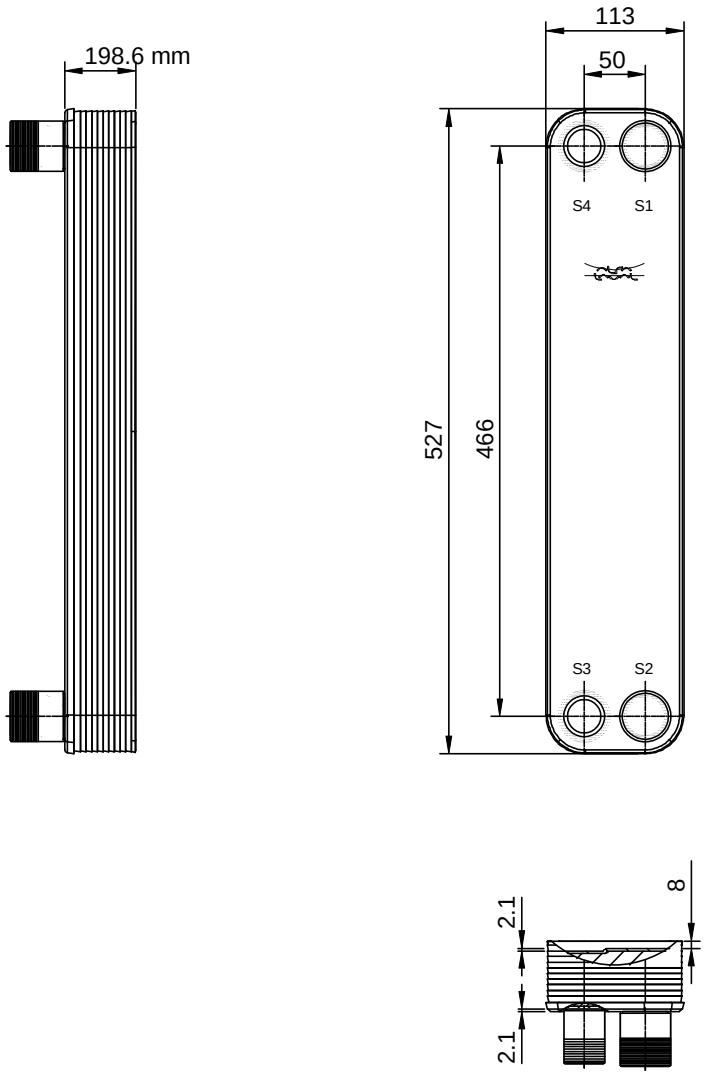

T1 T2 T3 T4 locations on back side
correspond to S1 S2 S3 S4 on front side

Frameplate is depressed 2.1 mm
at connections S3 and S4 if holed.
Pressureplate is depressed 2.1 mm
at connections T3 and T4 if holed.

ALL DIMENSIONS IN MILLIMETERS



HEATING SURFACE	4.524 m²	PLATE MATERIAL	Alloy 316	TOTAL LENGTH	243.6
NETWEIGHT	17.34 kg	PLATE THICKNESS	0.3 mm	TOTAL WIDTH	113.0
OPERATING WEIGHT	25.68 kg	PLATE GROUPING	1*39H / 1*40H	TOTAL HEIGHT	527.0

MEDIA	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
Water	S4	12.0 °C	S3	7.0 °C	5.1 m³/h	15.86 kPa	4.017
30.0% Eth.glycol	S2	5.0 °C	S1	10.0 °C	5.6 m³/h	16.64 kPa	4.120

SUPPLIER	REF.	MP NO.
AGENT/REF.		
CUSTOMER NAME / REF. NO.		
SIGN.		

PLATE HEAT EXCHANGER

CB60-80H

PED

ITEM ID.
32870 7964 7

DATE 2013-09-17

REV No. 0